

INELASTIC STATIC ANALYSIS OF BUILDING WITH SHEAR WALL

G.H.Dake¹, U.S.Salunkhe², V.B.Chavan³

¹PG student, ^{2,3}Assistant Professor
Civil Engineering Department
SYCET, Aurangabad
M.S., India.

Abstract—The earthquakes in the Indian subcontinent have led to an increase in the seismic zoning factor over many parts of the country. Also, ductility has become an issue for all building that was designed and detailed using earlier versions of the codes. Under such circumstances, seismic qualification of building has become extremely important. The structural engineering profession has been using the nonlinear static procedure (NSP) or pushover analysis. Modeling for such analysis requires the determination of the nonlinear properties of each component in the structure, quantified by strength and deformation capacities, which depend on the modeling assumptions. Pushover analysis is carried out for either user-defined nonlinear hinge properties or default-hinge properties, available in some programs based on the FEMA-356 and ATC-40 guidelines. This paper aims to evaluate the zone –V selected reinforced concrete building to conduct the non-linear static analysis (Pushover Analysis). The pushover analysis shows the pushover curves, capacity spectrum, plastic hinges and performance level of the building. The non-linear static analysis gives better understanding and more accurate seismic performance of buildings of the damage or failure element.

Keywords –SAP2000, shear wall, Pushover analysis,

I. INTRODUCTION

To perform a pushover analysis, a lateral load versus deformation curves for the member is required. The results from a pushover analysis will give the load versus deformation curves. Moreover, the pushover analysis gives only curve of the base shear versus roof displacement behavior of a building. The actual performance of a building may differ from the calculated performance, since the load versus deformation curves and the earthquake levels used in the analysis are estimates. The structural engineering profession has been using the nonlinear static procedure (NSP) or pushover analysis described in FEMA-356 and ATC-40, when pushover analysis is used carefully it provides useful information that cannot be obtained by linear static or dynamic analysis.

II. PUSHOVER ANALYSIS

The pushover analysis of structure is static non-linear analysis under permanent vertical load and gradually increasing lateral load. This lateral load represents forces induced by earthquake. The structure performance level is based on the roof drifts. The performance levels of a structural element are represented in the load versus deformation curve. The purpose of the pushover analysis is to evaluate the expected performance of a structural System in earthquake ground motion.

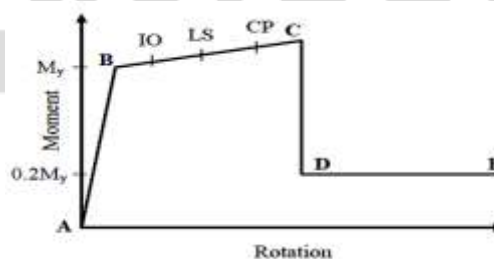


Fig 1: Performance Level of Pushover Analysis.

III. METHODOLOGY

To carry out the seismic analysis of building with different location of shear wall, the building with G+15 and G+ 20 storeys are considered. Following data of building along with different components and their sizes are summarized as shown in Table 1. And the figure 2 shows the plan of the RC building taken for analysis.

Table 1: Building Details

Member	Size
BEAM	230 X 480 mm
COLUMN	600 X 600 mm
SLAB	150 mm
SHEAR WALL	230 mm
GRADE OF CONCRETE	M20
GRADE OF STEEL	Fe 500

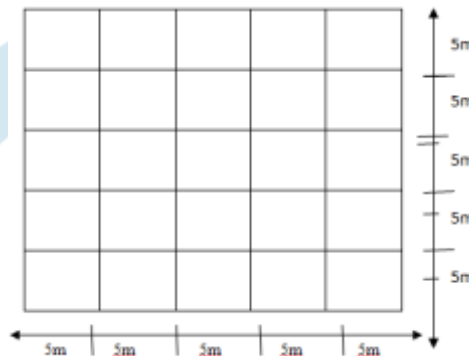


Fig 2: PLAN of G+15 and G+20 building.

Different models of G+15 and G+20 RC building with different location of shear wall are analyzed for pushover analysis as per the ATC 40-, FEMA-356 and FEMA-440 and the outcomes of these analyses are explained in performance evaluation.

Table 2: Building Details with abbreviations

Building Model(Storey)	Description	Abbreviation
G+15 and G+20	Bare frame	BARE
	Corner shear wall	COR-SW
	Central shear wall	CENT-SW
	Core shear wall	CORE-SW
	Periphery shear wall	PERI-SW

IV. PERFORMANCE EVALUATION

The main objective of this study is to examine the behaviour of building with different location of shear wall; the pushover analysis is carried out using finite element method based SAP 2000 software. The comparison is made between the structural responses of different building with different location of shear walls as shown in table 3.

PUSHOVER ANALYSIS-After applying target displacement in push-over analysis is carried out by using displacement control method and corresponding performance point and target displacement is found out.

PERFORMANCE POINT

The performance of the structure to the design seismic event can be accessed from the point where the demand and capacity curves intersect. The structure is considered to survive the design if the capacity curve intersects the demand curve, and collapse if the curves do not intersect. Such performance point is carried out from FEMA-440 method. Performance points of building are as shown in fig.3 & 4 and target displacement are shown in fig 5.

Table 3: Performance point for G+15 and G+20 building (ATC-40).

MODEL	G+15	G+20
	PERFORMANCE POINT	PERFORMANCE POINT
BARE	6257.15	9088.54
COR-SW	15660.98	19537.92
CENT-SW	18820.07	19901.29
CORE-SW	10926.23	16652.95
PERI-SW	12288.107	18280.3

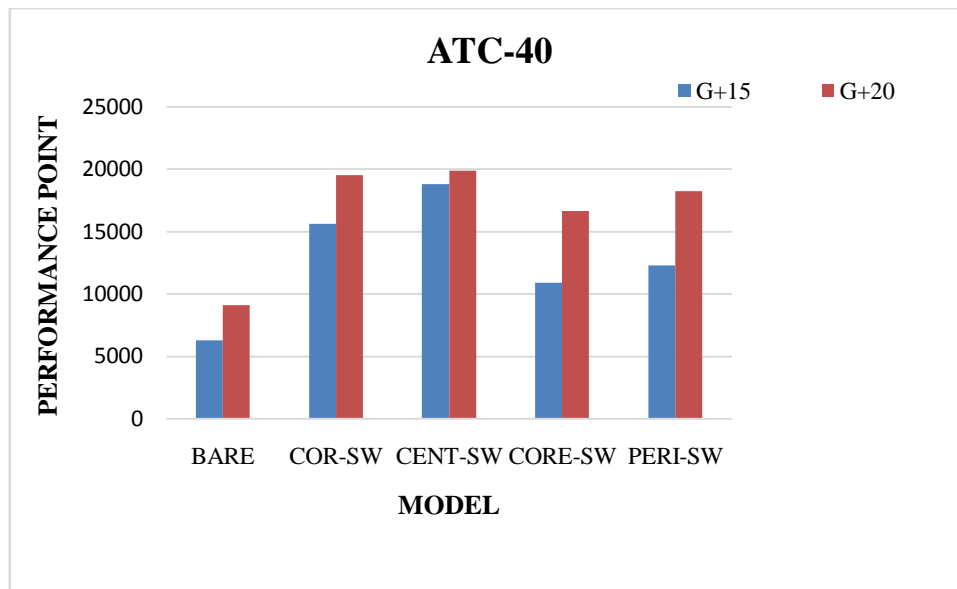


Figure 3: Performance point for G+15 and G+20 building.

Table 4: Performance point for G+15 and G+20 building (FEMA-440).

MODEL	G+15	G+20
	PERFORMANCE POINT	PERFORMANCE POINT
BARE	5399.82	8195.3
COR-SW	11322.56	12980.95
CENT-SW	13300.38	14445.57
CORE-SW	11573.04	11580.81
PERI-SW	12125.65	12436.2

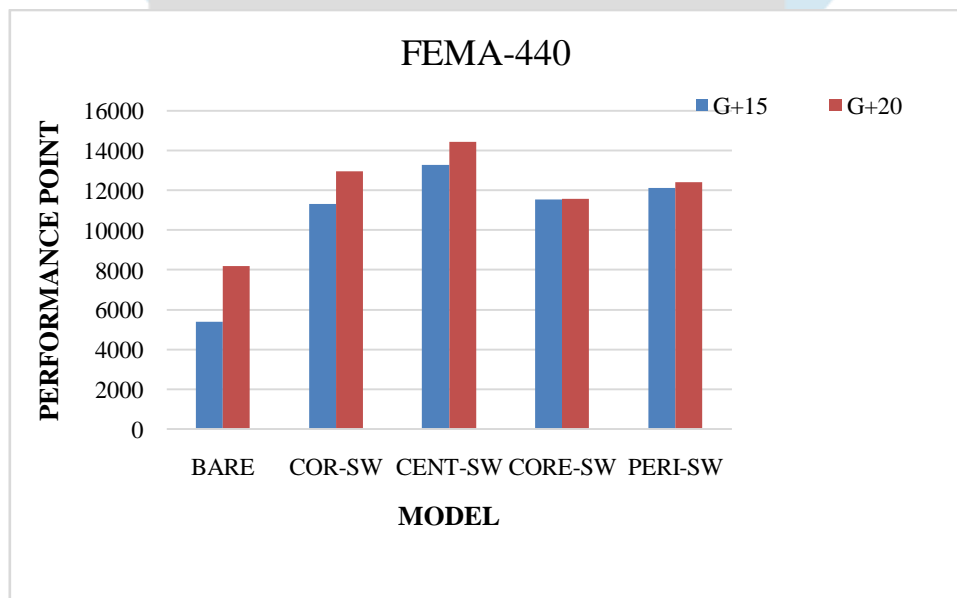


Figure 4: Performance point for G+15 and G+20 building.

Table 5: Target displacement for G+15 and G+20 building (FEMA-440).

MODEL	G+15	G+20
	TARGET DISPLACEMENT	TARGET DISPLACEMENT
BARE	8651.38	13014.66
COR-SW	15931.54	18502.57
CENT-SW	18439.14	18914.73
CORE-SW	14276.97	18963.48
PERI-SW	13368.65	18577.87

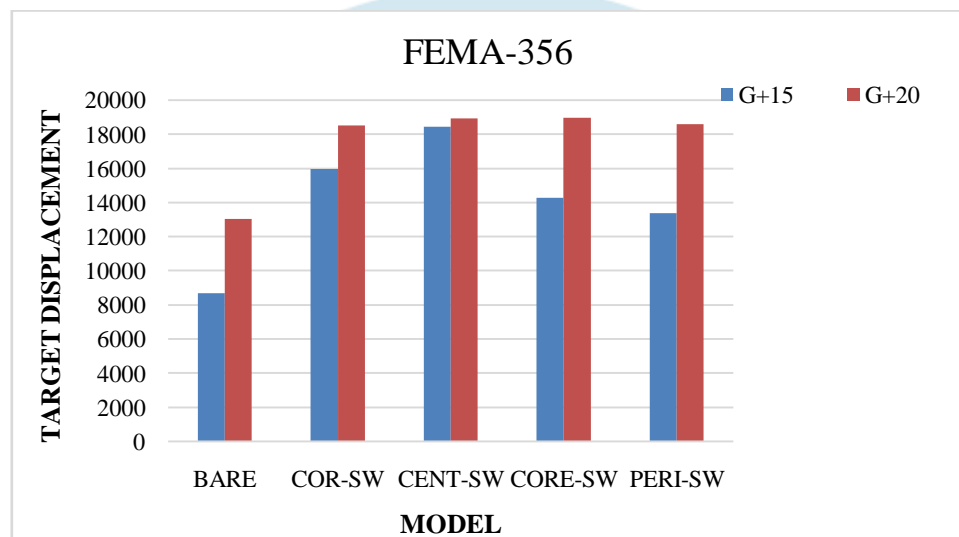


Figure 5: Target displacement for G+15 and G+20 building (FEMA-440)

V. RESULT AND DISCUSSIONS

From fig 3, 4 and 5, some results are drawn are as follows:

Among different locations as mentioned above building with different location of shear wall the central shear wall building better in increasing the stiffness of building. And after applying target displacement pushover analysis is carried out and it is found that central shear wall building performs well than bare frame. The building central shear wall performs well than other. As the height of building increases the performance point of building also increases. The target displacement is maximum in Central shear wall and minimum in bare frame.

VI. CONCLUSION

The performance of reinforced concrete frames was investigated using the pushover analysis. These are the conclusions drawn from the analyses:

- 1) The pushover analysis is a relatively simple way to explore the non linear behaviour of buildings.
- 2) ATC-40 and FEMA-440 code gives the approximate same result.
- 3) Central shear wall building having higher performance than other.
- 4) The behaviour of properly detailed reinforced concrete frame building is adequate as indicated by the intersection of the demand and capacity curves and the distribution of hinges in the beams and the columns. Most of the hinges developed in the beams and few in the columns but with limited damage.

REFERENCES

- [1] Nikhil Agrawal, Prof. P.B Kulkarni, Pooja Raut, " Analysis of Masonry Infilled R.C. Frame with &without Opening Including Soft Storey by using "Equivalent Diagonal Strut Method" International Journal of Scientific and Research Publications, Volume 3, Issue 9, September 2013, pp-1-8.
- [2] Mohammad H. Jinya1, V. R. Patel analysis of RC frame with and without masonry infill wall with different stiffness with outer central opening International Journal of Research in Engineering and Technology ISSN: 2319-1163, ISSN: 2321-7308.

- [3] Made Sukrawa, "Earthquake response of RC infill frame with wall openings in low-rise hotel buildings" ScienceDirect, Procedia Engineering 125 (2015) 933 – 939.
- [4] Mehmet Inel and Hayri B Ozmen, "Effect of infill walls on soft story behavior in mid-rise rc buildings" The 14th World Conference on Earthquake Engineering October 12-17, 2008, Beijing, China.
- [5] Luis decanini, Fabrizio mollioli, Andrea mura, Rodolfo saragoni, "seismic performance of masonry infill RC frames" 13th World Conference on Earthquake Engineering Vancouver, B.C., Canada August 1-6, 2004 Paper No. 165.
- [6] T. Mahdia* and V. Bahreini, "Seismic Response of Asymmetrical Infill Concrete Frames" The 2nd International Conference on Rehabilitation and Maintenance in Civil Engineering, Science Direct, Procedia Engineering 54 (2013) pp - 341 – 352.
- [7] Rahul rana , Liminjin and Atilazekioglu, "pushover analysis of a 19 story concrete shear wall building" , 13th World Conference on Earthquake Engineering, Vancouver, B.C., Canada, August 1-6, 2004, Paper No. 133.
- [8] Lakshmi K.O., Prof. Jayasree Ramanujan, Mrs. Bindu Suni, Dr. Laju Kottallil, Prof. Mercy Joseph Poweth, "Effect of shear wall location in buildings subjected to seismic loads" , ISOI Journal of Engineering and Computer science, Volume 1 Issue 1; Page No. 07-17.
- [9] Shahabodin, Zaregarizi, Comparative investigation on using shear wall and infill to improve seismic performance of existing building, The 14th World Conference on Earthquake Engineering October 12-17, 2008, Beijing, China.
- [10] P. P. Chandurkar, Dr. P. S. Pajgade, Seismic Analysis of RCC Building with and Without Shear Wall, International Journal of Modern Engineering Research (IJMER) Vol. 3 ISSN: 2249-6645, Issue. 3, May - June 2013 pp-1805-1810.
- [11] Anshuman.S, Dipendu Bhunia, Bhavin Ramjiyani, Solution of Shear Wall Location in Multi-Storey Building, international journal of civil and structural engineering Volume 2, No 2, 2011, ISSN 0976 – 4399, pp- 493-506.
- [12] Ghalimath A.G, Waghmare Y.M, Zadbuke A.A , Chaudhari A.R, Seismic Comparative Study of Multistoried R.C.C Building with Shear Wall in Bare Frame and Masonry Infill Frame For Various Types of Soil and Seismic Zones. International Research Journal of Engineering and Technology (IRJET) e-ISSN: 2395 -0056 Volume:, 02 Issue: 05 Aug-2015 p-ISSN: 2395-0072.
- [13] R.S.Mishra, V.Kushwaha, S.Kumar, "A Comparative Study of Different Configuration of Shear Wall Location in Soft Story Building Subjected to Seismic Load". International Research Journal of Engineering and Technology (IRJET) e-ISSN: 2395 -0056 Volume: 02 Issue: 07, Oct-2015, IRJET ISO 9001:2008 Certified Journal Page 513.
- [14] Misam.A, Mangulkar Madhuri.N. , "structural response of soft story-high rise buildings under different shear wall location", International journal of civil engineering and technology, ISSN 0976 – 6308, Volume 3, Issue 2, July-December (2012), pp. 169-180.
- [15] Ashish S. Agrawal, S.D. Charkha, "Effect of change in shear wall location on storey drift of multi-storey building subjected to lateral loads" , International Journal of Engineering Research and Applications (IJERA) ISSN: 2248-9622 , Vol. 2, Issue 3, May-Jun 2012, pp. 1786-1793 1786 .
- [16] Shahzad Jamil Sardar and Umesh. N. Karadi , "Effect of change in shear wall location on storey drift of multi-storey building subjected to lateral loads" International Journal of Innovative Research in Science, Engineering and Technology (An ISO 3297: 2007 Certified Organization) Vol. 2, Issue 9, September 2013, pp- 4241-4249.
- [17] Nitin Choudhary | Prof. Mahendra Wadia, "Pushover Analysis of R.C. Frame Building with Shear Wall", IOSR Journal of Mechanical and Civil Engineering (IOSR-JMCE) e-ISSN: 2278-1684, ISSN: 2320-334X, Volume 11, Issue 2 Ver. V (Mar- Apr. 2014), PP 09-13.